


# DURAMAG®

ALUMINUM SERVICE BODIES FOR ALL APPLICATIONS. MADE IN THE USA.




<b>Control Ability</b>	Single Channel Control
<b>Input Voltage</b>	12VDC
<b>Output Power</b>	12VDC
<b>Current</b>	20A
<b>Kit Includes</b>	2 Hand Remotes, 1 Control Box, Wire Harness
<b>Remote Functions</b>	Up, Down, Pause (Momentary & Non-Momentary)
<b>Remote Battery Type</b>	2x CR2016 3V Lithium Cell
<b>Size (L x H x W)</b>	3.5" x 1.1" x 2.7"
<b>Weight</b>	0.45 lbs
<b>Warranty</b>	18 Months

## DIMENSIONS

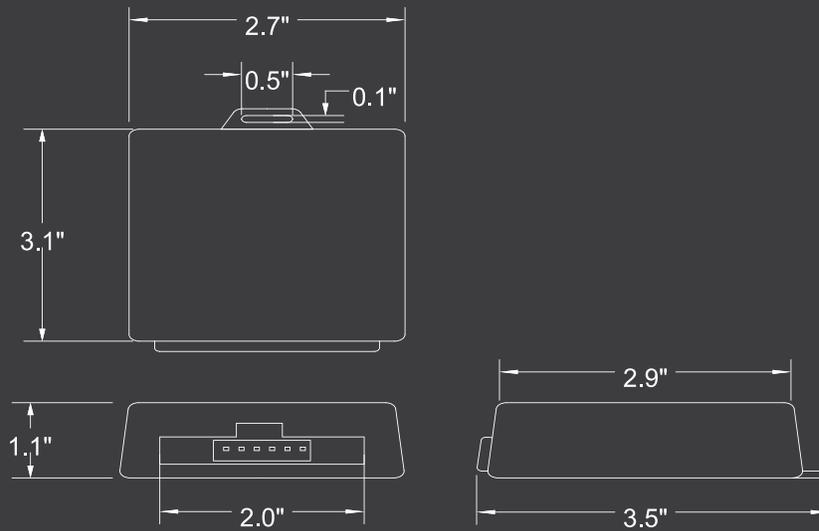

## WIRING DIAGRAM

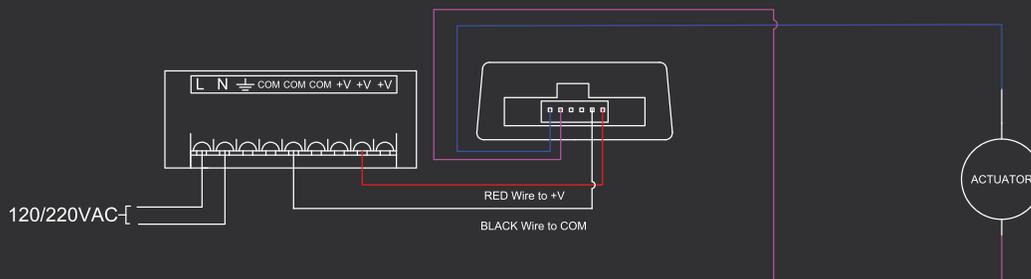

Type: DC Motor,  
Bi-directional

No. Connections: 2

## MOMENTARY/NON-MOMENTARY MODE

- Momentary Mode
- Ensure the Jumper S1 on the PCB is connected
- Hold UP to extend the actuator, let go to stop the actuator
- Hold DOWN to retract the actuator, let go to stop the actuator
- Non-Momentary Mode
- Ensure the Jumpers S1 on the PCB is disconnected
- Press UP to extend the actuator, Press UP again to stop the actuator
- Press DOWN to retract the actuator, Press DOWN again to stop the actuator
- If DOWN is pressed while the actuator is extending, it will reverse direction and begin to retract

## REMOTE SYNCHRONIZATION PROCESS

- Open the control box and press the white button. The blue LED will turn on
- Press any button on the remote and the LED will turn off
- The remote is now saved to the control box
- A maximum of two remotes can be saved to one control box