


monroe
a brand of aebi schmidt


DuraMag MagLock

Control Ability	Single Channel control
Input Voltage	12V DC
Output Voltage	12V DC
Current	20A
Kit Includes	2 Hand Remotes, 1 control Box, Wire Harness
Remote Functions	Up, Down, Pause (momentary & Non-Momentary)
Remote Battery Type	2x CR2016 3V Lithium Cell
Size (L x H x W)	3.5” x 1.1” x 2.7”
Weight	0.45 lbs
Warranty	18 months

Dimensions

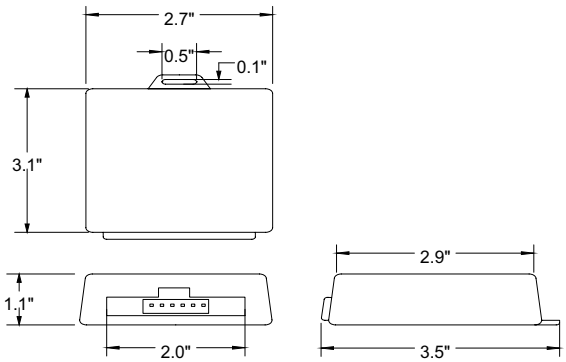

Wiring Diagram

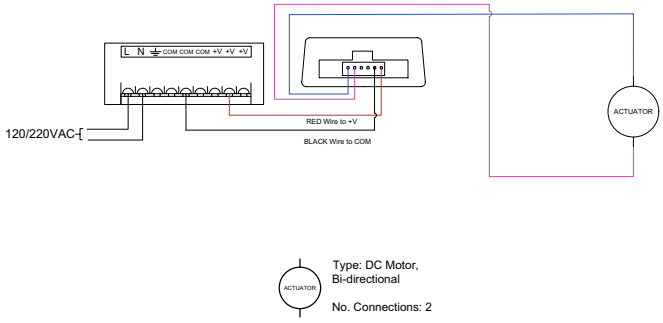

Momentary/Non-Momentary Mode

Momentary Mode

- Ensure the Jumper S1 on the PCB is connected
- Hold **UP** to extend the actuator,
  let go to stop the actuator
- Hold **DOWN** to retract the actuator,
  let go to stop the actuator

Non-Momentary Mode

- Ensure the Jumpers S1 on the PCB is disconnected
- Press UP to extend the actuator,
  Press UP again to stop the actuator
- Press DOWN to retract the actuator,
  Press DOWN again to stop the actuator
- If DOWN is pressed while the actuator is extending,
  it will reverse direction and begin to retract

Remote Synchronization Process

- Open the control box and press the white button.
  The blue LED will turn on
- Press any button on the remote and the LED will turn off
- The remote is now saved to the control box
- A maximum of two remotes can be saved to one control box

© Aebi Schmidt Group
www.aebi-schmidt.com/usa
Aebi Schmidt North America Inc.
Chilton, WI 53014

All rights reserved. Technical data is subject to change. Illustrations are not binding. Errors and amendments excepted.

DM.2026.0151

You don't have to give up the superior bodies and uncompromising quality you trust. With DuraMag now part of the Monroe brand, our industry-leading commercial portfolio is stronger and more diversified than ever.

monroe
a brand of aebi schmidt